

FILL-O-GROUT


Heat Insulation cum Waterproof Tile Grout



FILL-O-GROUT HEAT INSULATION CUM WATERPROOF TILE GROUT

Fill-O-Grout, Heatproof & Waterproof Grouts are designed for use in INSULLA® tile applications. Fill-O-Grout offers high structural strength to the tile joints and prevents cracks from thermal expansion and contraction of building.

Tile Grout

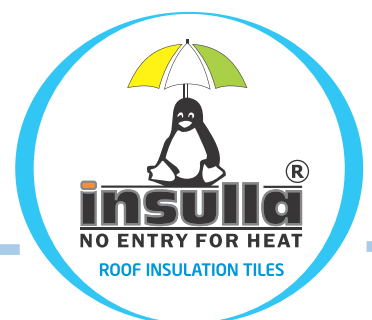

FILL-O-GROUT SYSTEM



PRODUCT DESCRIPTION

1. Heatproof cum Waterproof Grout Filler
2. Exclusive sanitized biocides
3. Lasting protection against mould and mildew

Fill-O-Grout, Heatproof & Waterproof Grouts are designed for use in INSULLA[®] tile applications. Fill-O-Grout offers high structural strength to the tile joints and prevents cracks from thermal expansion and contraction of building.

FEATURES

1. Hydraulic lime based Heatproof cum water proofing grouting
2. Mixed with water, produces a soft, creamy, easily worked mortar with good filling properties, enabling deep joints to be filled in one operation.

SURFACE PREPARATION

Ensure all loosen materials and droppings are removed from grout joint prior to grouting and wet the joints before application if required.

APPEARANCE

Colour - White (Powder)

COVERAGE

150 - 175 Sq.ft (Approx) Per 25 Kg Pallet according to 5mm width & 15mm depth for 9" X 9" Size INSULLA[®] Tile.

MIXING

1. Add clean water to buckets, then slowly add the Fill-O-Grout powder, stirring continuously until a lump-free consistency is achieved.
2. The mixing ratio : Thick filler grouts: 25kg powder: (6~6.5) kg water;
Thin filler grouts: 25kg powder: (8.5~9) kg water.
3. Use a rubber trowel to spread Fill-O-Grout - tile grout into the tile joints in a diagonal way and ensure that all joints are properly filled.
4. After about 2 hours of drying, The grout on tile surface should be cleaned with wet sponge or cloth.
5. After 24 hours of drying, The grout haze on tile surface can be cleaned using tile cleaner and water.

PRECAUTIONS

1. Do not use acid to clean tiles especially when colour grout is used.
2. Do not use in the rainy condition.
3. Do not use with the temperature of above 40°C and below 5°C. The grout joint should not be less than 3mm.
4. Do not mix the cured grout adhesive with water and reuse it.

SHELF LIFE

Unopened bags can be stored for up to 12 months in a cool, dry environment.

HEALTH AND SAFETY

May cause sensitization by skin contact. Keep out of reach of children. Avoid contact with skin and eyes. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. Wear suitable gloves.

For further information please refer to Material Safety Data Sheet.

Tile Grout

JAPEVA[®]
ENGINEERING PVT.LTD.,

#6, Thirumurugan Nagar, 3rd Cross Street, Porur, Chennai-600 116. Tamil Nadu. India. E-Mail: japevaengg15@gmail.com

Phone: 91-44-24 76 6212 / 4281 6262 Helpline : 8056-345678 web: www.insulla.com